





BCMA Series

FEATURES








-
-
-
-


APPLICATIONS

-




Part No	Impedance Min. (Ω)	Impedance Typ. (Ω)	Test Condition (MHz)	Rated Current Max. (A)	DC Resistance Max. (Ω)	Rated Voltage Max. (Volts)	Insulation Resistance Min. (M Ω)

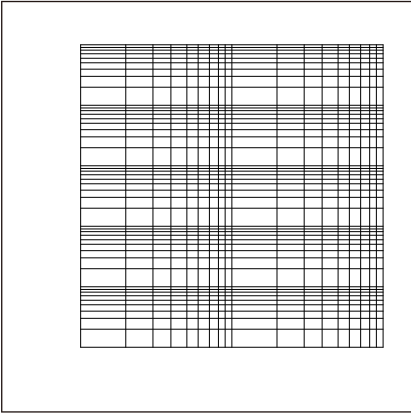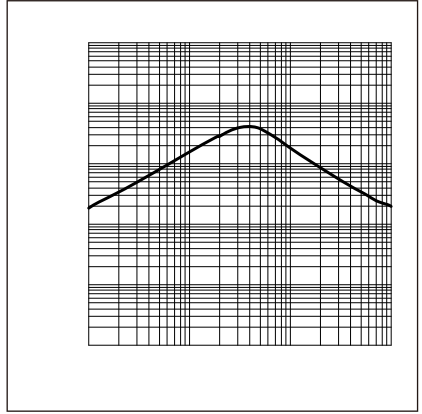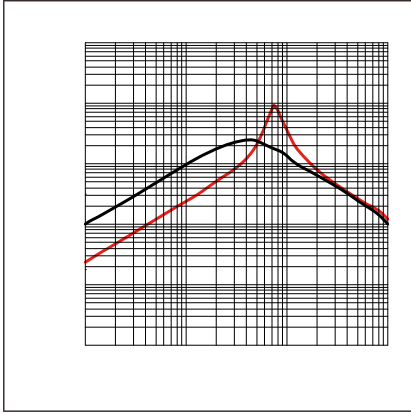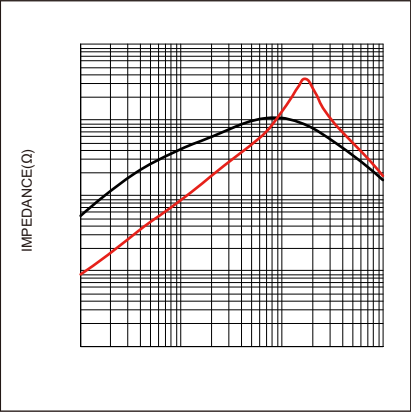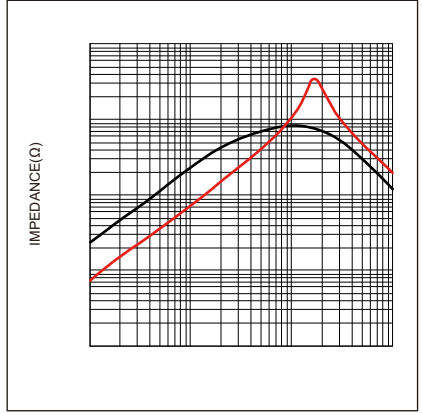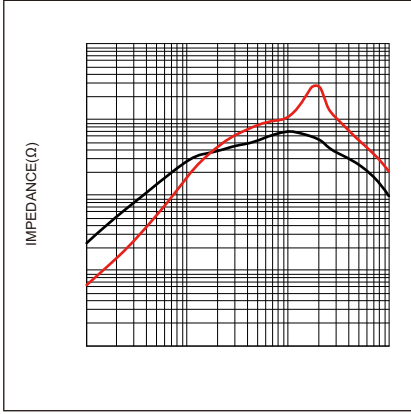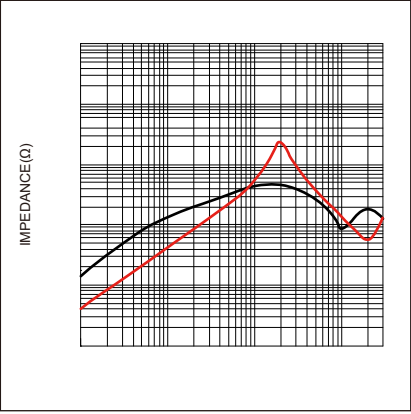

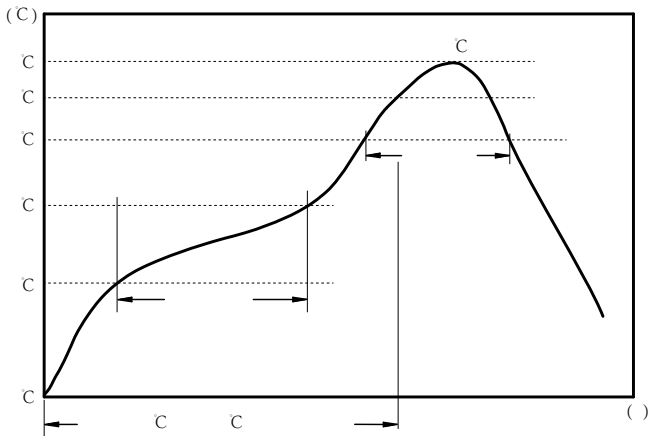


:

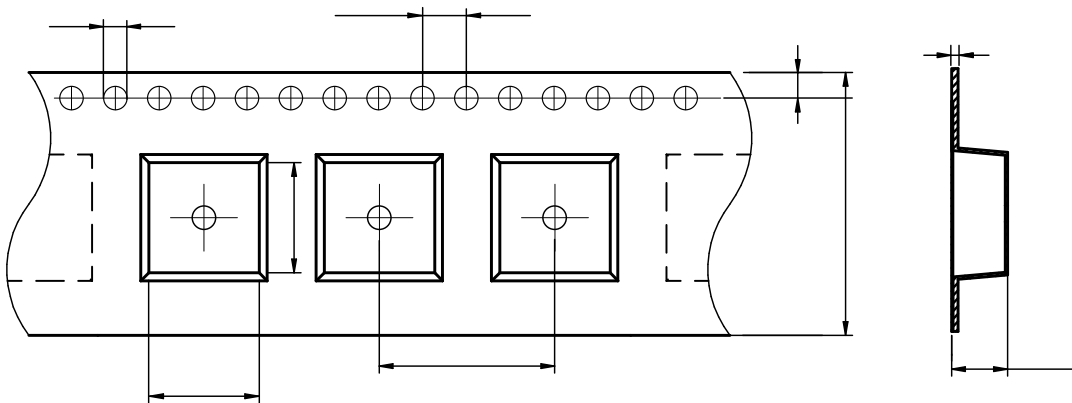



11.3± 0.1	13.0± 0.1	1.5± 0.1	4.0± 0.1	16.0± 0.1	24.0± 0.3	6.6± 0.1	1.75± 0.1	0.40± 0.05

Marking	Printing Impedance)
---------	---------------------

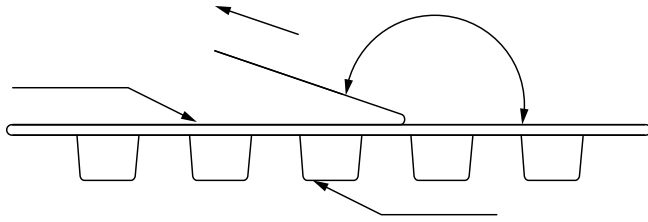

The peel force of top cover tape shall be between 0.10 to 1.17 N


:

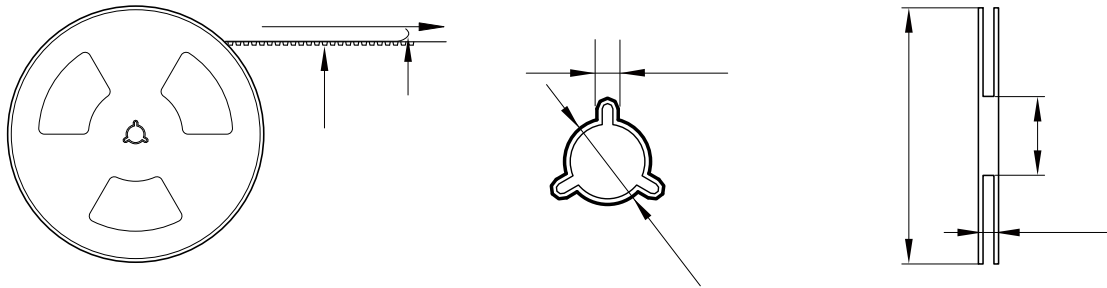

500 Pcs/Reel



2 Reel /Inner box(1000 Pcs)



3 Inner box/Carton box(3K Pcs)

:

•

•

•

•

•

•

•

•