


# MDTE Series

## Wire Wound Molded SMD Power Inductors

### Size 1513



#### FEATURES

- 
- 
- 
- 
- 
- 



°C

#### APPLICATION

- 
- 

#### Dimensions: [mm]

#### Land Pattern: [mm]

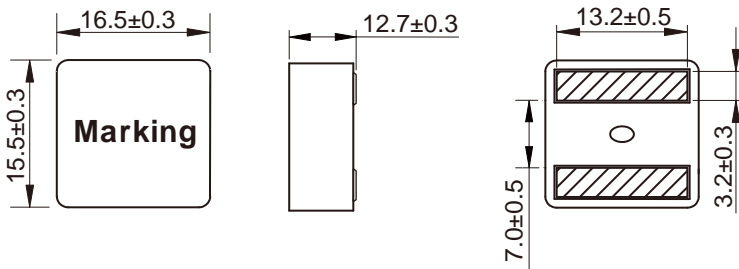

#### Electrical Properties:

Part No	Inductance @ 100KHz/0.1V	Tolerance	Current Typ.	Current Max.	Temperature Rise Current Typ.	DC Resistance Max.
?						
?						
?						
?						
?						
?						
?						
?						

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$




## Soldering Reflow:

## Packaging Information:

Tape Dimension:

Series	A0 (mm)	B0 (mm)
--------	------------	------------

Peel force of top cover tape:

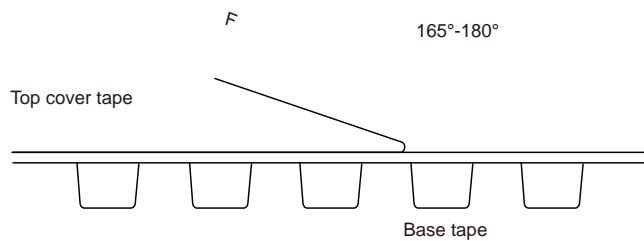



Reel Dimension: [mm]



Packaging Quantity: