



MDSA Series


FEATURES

- Shielded construction
- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C(including self-temperature rise)
- Quantity: 2000PCS



APPLICATION


- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability.
- Boost-Converter
- Buck-Converter DC/DC



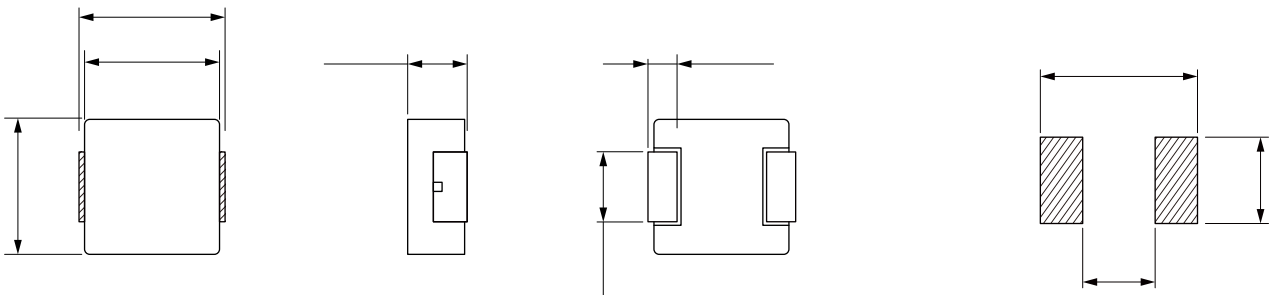



	(μ H)			Saturation	(m)	(m)
MDSA5030-R20M	0.20	$\pm 20\%$	13.8	19.6	3.80	4.10
MDSA5030-R47M	0.47	$\pm 20\%$	13.2	9.8	5.30	6.20
MDSA5030-R68M	0.68	$\pm 20\%$	12.3	8.7	7.70	8.80
MDSA5030-R82M	0.82	$\pm 20\%$	9.8	8.5	8.20	9.40
MDSA5030-1R0M	1.00	$\pm 20\%$	8.9	8.4	11.2	12.6
MDSA5030-1R5M	1.50	$\pm 20\%$	7.9	7.3	13.9	16.0
MDSA5030-2R2M	2.20	$\pm 20\%$	6.9	6.3	22.0	25.8
MDSA5030-3R3M	3.30	$\pm 20\%$	6.3	5.9	28.3	34.0
MDSA5030-4R7M	4.70	$\pm 20\%$	5.5	5.2	39.0	45.0




	(μH)			Satura on	(m)	(m)
MDSA5030-5R6M	5.60	$\pm 20\%$	4.9	4.5	52.0	60.0
MDSA5030-6R8M	6.80	$\pm 20\%$	4.3	3.4	58.0	68.0
MDSA5030-100M	10.0	$\pm 20\%$	3.7	2.4	89.0	105.0
MDSA5030-150M	15.0	$\pm 20\%$	2.8	2.1	142.0	173.0

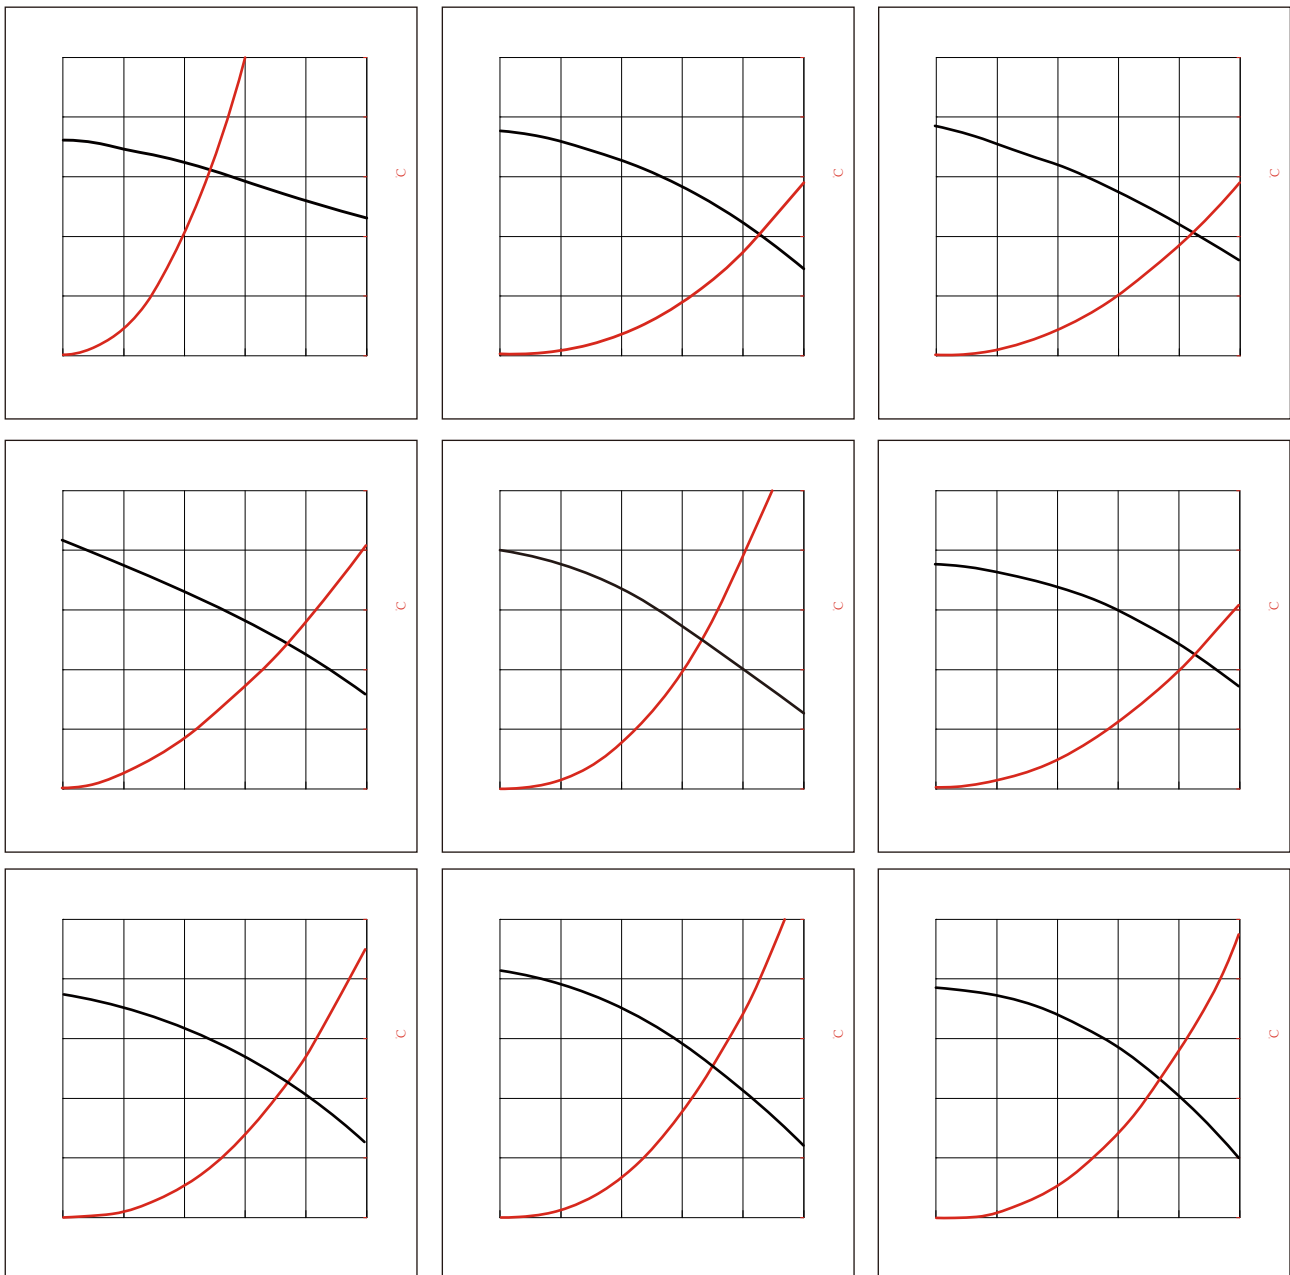

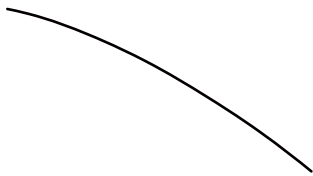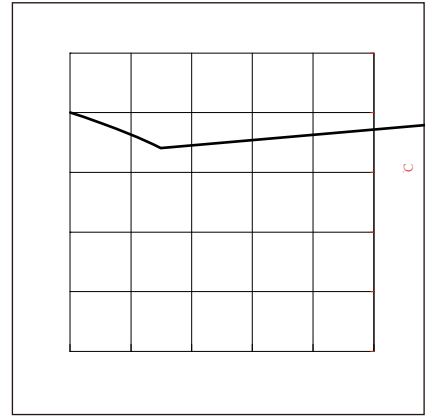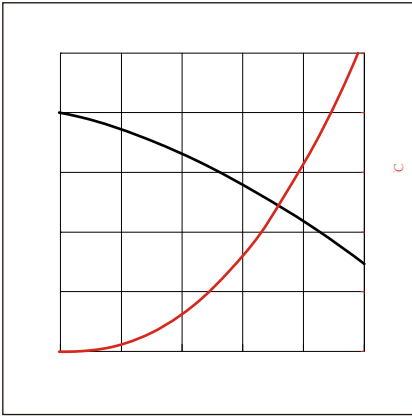

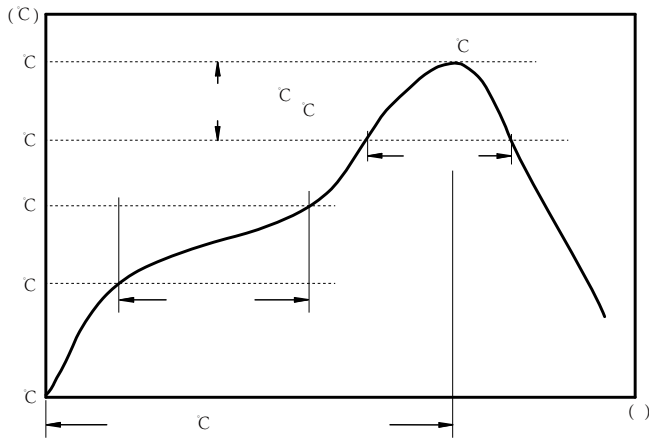

:

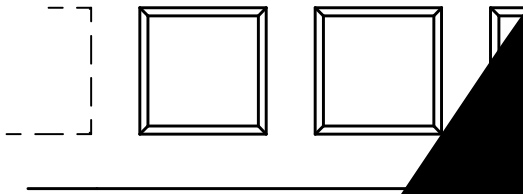

MDSA5030	5.5±0.1	5.0±0.1	5.0±0.3	3.3±0.1	1.75±0.1	0.35±0.05	

between 0.1 to 1.3 N

nting (Inductance)



:

