

NRSA Series

SMD Power Inductors For Automotive

Size 201610




FEATURES

- Magnetic shield type wound inductor for power circuits using a ferrite magnetic material
- High magnetic shield construction and compatible with high-density mounting
- Larger current and lower Rdc were achieved by optimizing the ferrite core figure.
- Operating temperature: -55 to +125°C (including self-temperature rise)
- AEC-Q200 qualified
- Quantity: 2000pcs


APPLICATION

- Car navigation, car stereo and car accessories only

Dimensions: [mm]

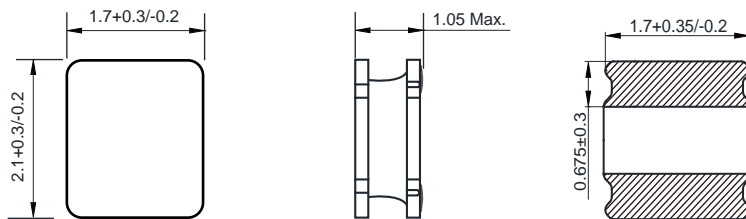

Land Pattern: [mm]



Electrical Properties:


| | (μ H) | | (A) | Saturation (A) | (m Ω) | (m Ω) |
|-----------------|------------|------|------|-------------------|---------------|---------------|
| NRSA201610-R47N | 0.47 | ±30% | 2.16 | 2.70 | 41 | 53 |
| NRSA201610-R68N | 0.68 | ±30% | 1.60 | 2.00 | | 82 |
| NRSA201610-1R0M | 1.00 | ±20% | 1.60 | 2.00 | 90 | 115 |
| NRSA201610-1R5M | 1.50 | ±20% | 1.36 | 1.70 | 137 | 156 |
| NRSA201610-2R2M | 2.20 | ±20% | 1.01 | 1.26 | 155 | 174 |
| NRSA201610-3R3M | 3.30 | ±20% | 0.84 | 1.05 | 240 | 294 |
| NRSA201610-4R7M | 4.70 | ±20% | 0.68 | 0.85 | 340 | 432 |
| NRSA201610-6R8M | 6.80 | ±20% | 0.58 | 0.72 | 575 | 620 |
| NRSA201610-100M | 10.0 | ±20% | 0.48 | 0.60 | 730 | |
| NRSA201610-150M | 15.0 | ±20% | 0.39 | 0.55 | 1300 | 1680 |
| NRSA201610-180M | 18.0 | ±20% | 0.32 | 0.40 | 1360 | 1700 |
| NRSA201610-220M | 22.0 | ±20% | 0.30 | 0.38 | 1550 | 2000 |

Saturation Current will cause L to drop approximately 35%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:


Soldering Reflow:

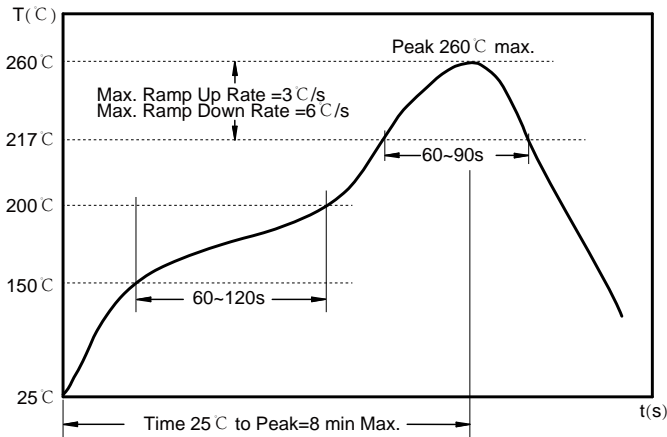

Preheat condition: 150 ~200 °C / 60~120 sec.
 Allowed time above 217 °C: 60~90 sec.
 Max temperature: 260 °C.
 Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

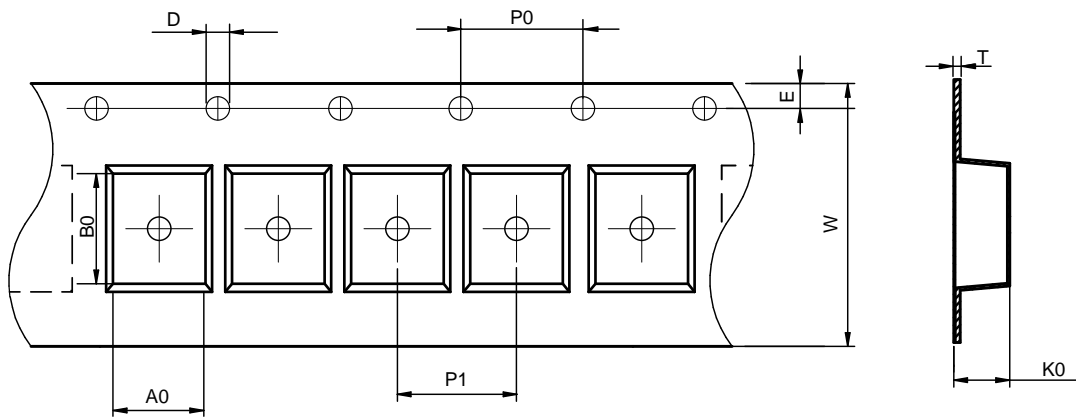


| Series | A0 (mm) | B0 (mm) | D (mm) | P0 (mm) | P1 (mm) | W (mm) | K0 (mm) | E (mm) | T (mm) |
|------------|----------|----------|---------|---------|---------|---------|-----------|----------|-----------|
| NRSA201610 | 1.9±0.05 | 2.2±0.05 | 1.5±0.1 | 4.0±0.1 | 4.0±0.1 | 8.0±0.3 | 1.20±0.05 | 1.75±0.1 | 0.25±0.02 |

Peel force of top cover tape:

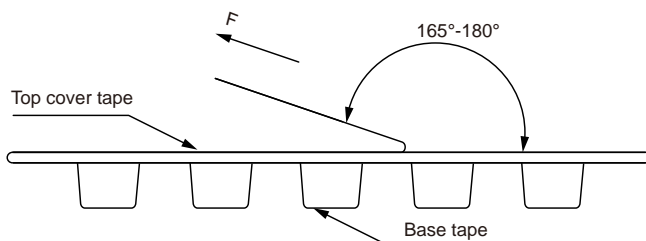


The peel force of top cover tape shall be between 0.2 to 0.58 N

Reel Dimension: [mm]

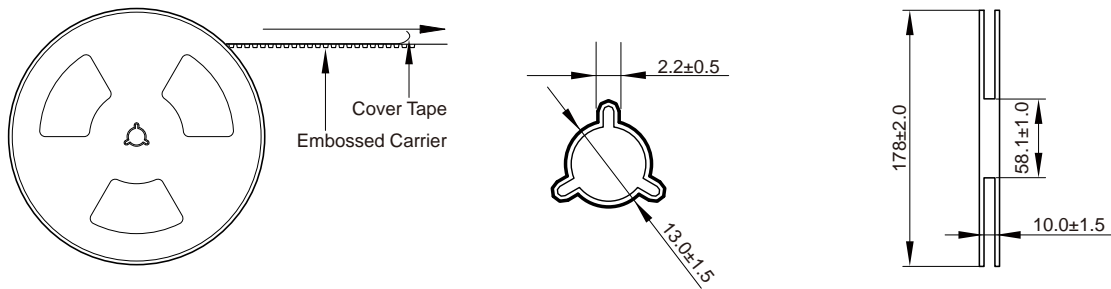

Packaging Quantity:

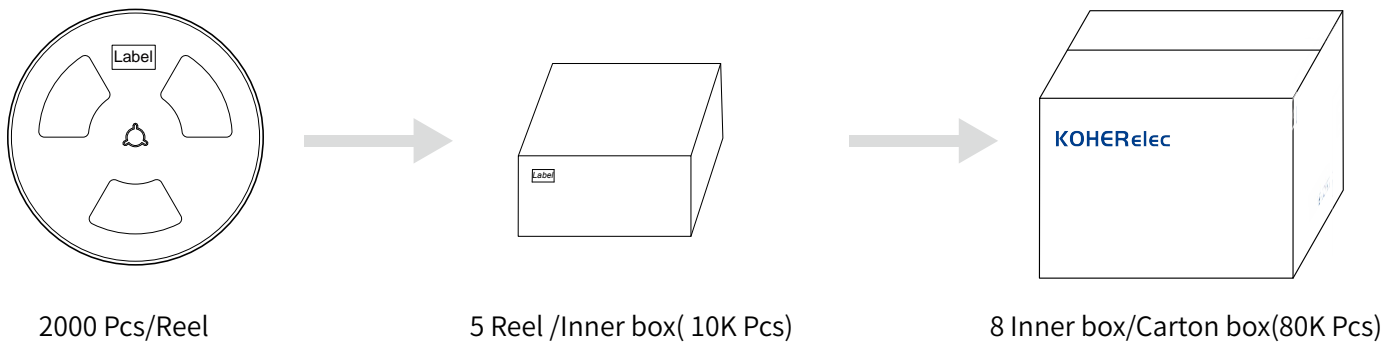

Cautions and Warnings:

Storage Conditions :

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.