


MDCA Series

SMD Power Inductor

Size 1350





FEATURES

- Shielded construction.
- Capable of corresponding high frequency.
- Low loss realized with low DCR.
- High performance (Isat) realized by Carbonyl Powder.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +125 °C(including self-temperature rise)
- Quantity: 500pcs


APPLICATION

- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation



Dimensions: [mm] L > 1.5μH

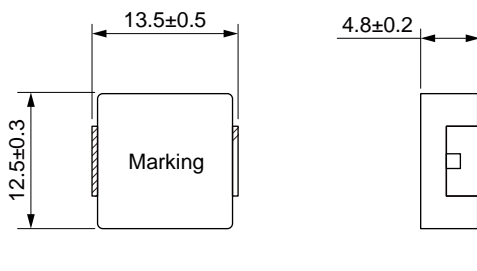

Land Pattern: [mm]



Dimensions: [mm] L = 1.5μH

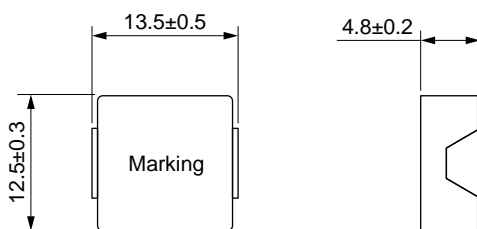

Electrical Properties:

Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
MDCA1350-R20M	0.20	±20%	52.0	110	0.45	0.55
MDCA1350-R22M	0.22	±20%	52.0	110	0.50	0.70
MDCA1350-R33M	0.33	±20%	42.0	80.0	0.70	0.90
MDCA1350-R36M	0.36	±20%	42.0	75.0	0.75	0.95
MDCA1350-R47M	0.47	±20%	38.0	65.0	0.86	1.10

